Smart Power Drive

User Manual

Version_010

Index

Getting to know Smart Power Drive

1	Standard USB port	Connect to an Android phone for file transmission and charging.
2	Micro SD card slot	Supports a Micro SD card with capacity up to 32GB
3	Micro USB port	Connecting it with a cable at its Micro USB port to any PC/NB, USB charger, power bank USB port and any 5V output USB port to charge your Smart Power Drive
4	Power On/Off button	Power on: press and hold the button for 3 seconds Power off: press and hold the button for 3 seconds Flashlight on: press the button twice
5	Power LED indicator	Power on: Blue indicator 1 on→power 25% Blue indicator 1~2 on→power 50% Blue indicator 1~3 on→power 75% Blue indicator 1~4 on→power 100% Charging： Blue indicator 1 flashes→power under 25% Blue indicator 1 on、Blue indicator 2 flashes→power 25%~50% Blue indicator 1~2 on、Blue indicator 3 flashes→power

50%~75%

Blue indicator 1~3 on、Blue indicator 4 flashes→power

75%~99%

Fully charging：Blue indicator 1~4on

Use of Smart Power Drive

Connect the USB port with USB Male to Micro USB Male cable to Android phone and turn on the power. You can start to transfer the file between Smart Power Drive and phone and charge the phone.

Note: Smart Power Drive cannot be used as a PC-card reader.

System Requirements

For Android devices

Android 4.0 or higher, and compliant with Android Open Accessory Protocol.

Connecting to PC/NB

The Smart Power Drive can be charged when it's connected to PC/NB.

Disconnecting from Mobile Phone Safely

To remove your Smart Power Drive from a mobile phone safely, tap the Return key in the Local Storage main screen (Figure 1) or the External Storage main screen (Figure 2) to confirm ejecting the device before removing your Smart Power Drive.
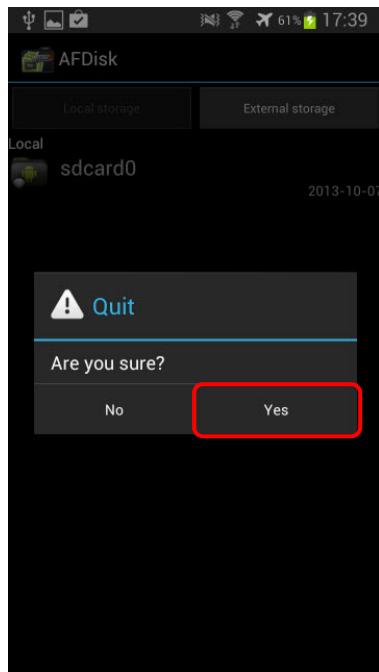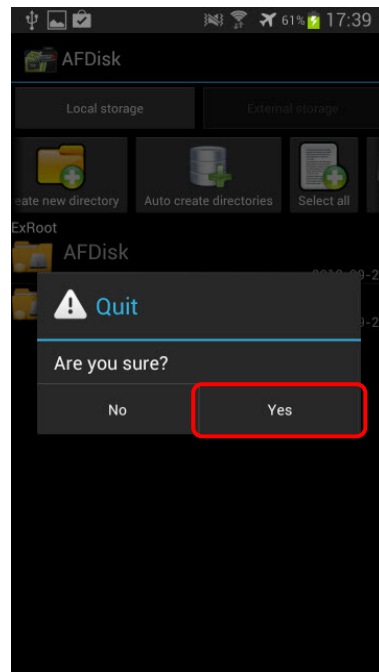
Figure 1

Figure 2

Installing the Smart Power Drive App

The AFDisk App is exclusively designed for your Smart Power Drive. Your Smart Power Drive may guide you to the Play Store to download and install the APP. (Please ensure that your mobile phone is connected to a WiFi hot point or 3G network.)

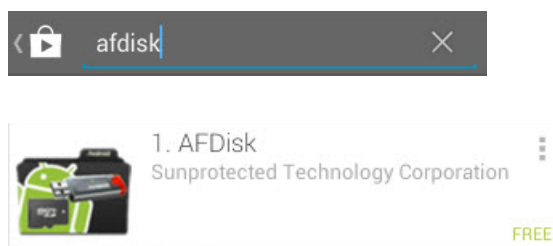1. Insert your Smart Power Drive and power it on. Tap on "View" after being prompted by the system.
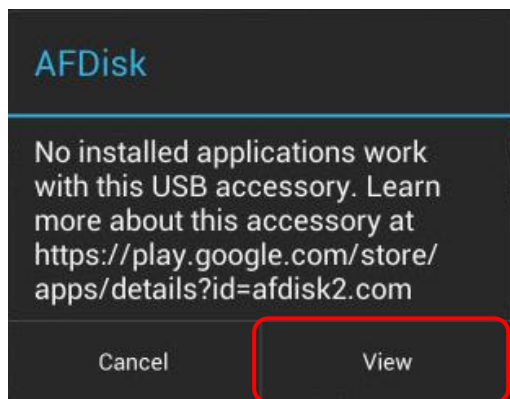
2. Select "Play Store" and the Smart Power Drive APP screen displays.
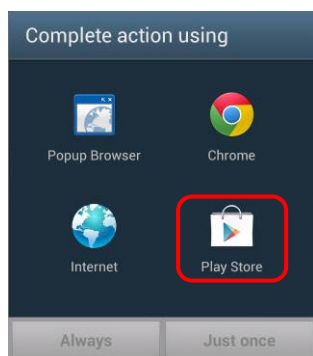
3. Download and install the APP as prompted by the Play Store. The APP icon displays on desktop screen once the installation is completed.

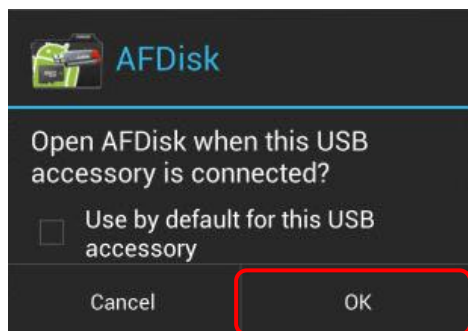You may search for"afdisk" directly from the Play Store for the APP download and installation.

Start Using Smart Power Drive

1. Insert your Smart Power Drive then press the power button to turn it on. Tap on ”OK” as prompted by the system.

2. The APP's main screen (Figure 2) displays after the power on screen (Figure 1) is shown.
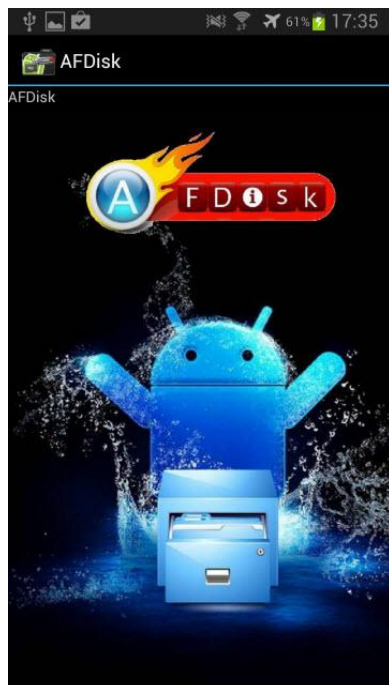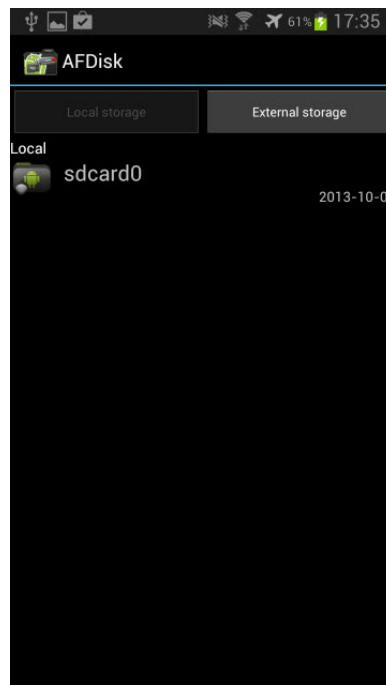

        Figure 1   Figure 2

3. You may select to enter the Local Storage or External Storage menu to manage your files.

Smart Power Drive main screen description

Main Screen

The APP's main screen displays the default folder of the "Local Storage" (Figure 1) which contains all the folders in your mobile phone's internal memory and the micro SD card (Figure 2).
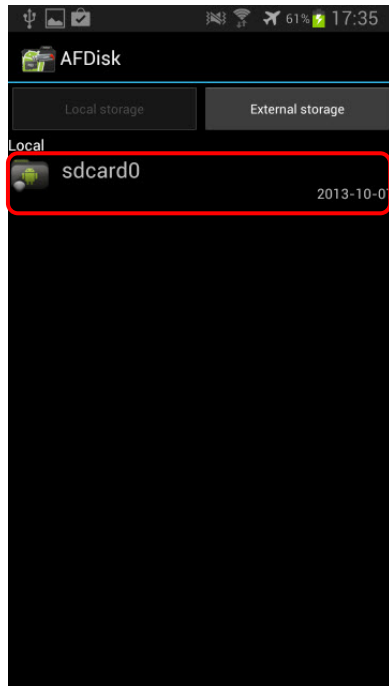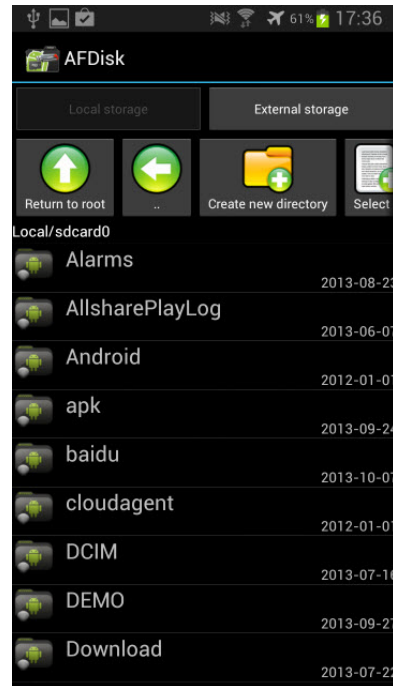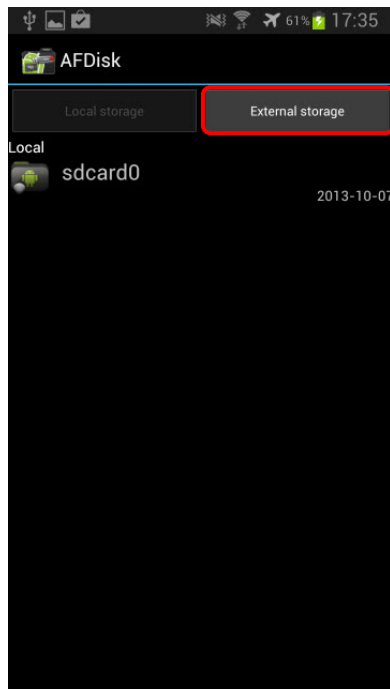

Figure 1   Figure 2

Tap on the "Local Storage" icon in the tool bar to switch to the Smart Power Drive's storage area.
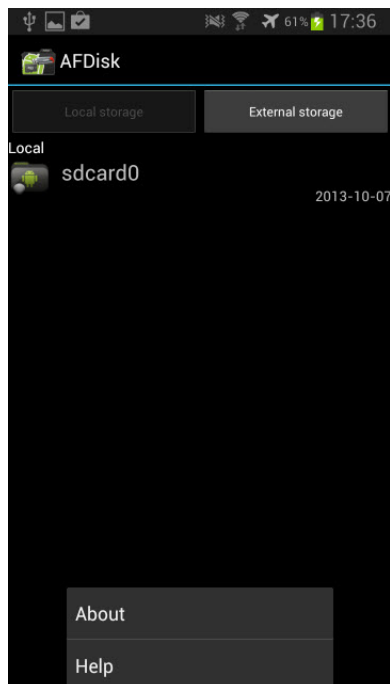
Note: The Smart Power Drive's External Storage icon does not appear if no micro SD card is inserted.

Smart Power Drive storage area

About & Help

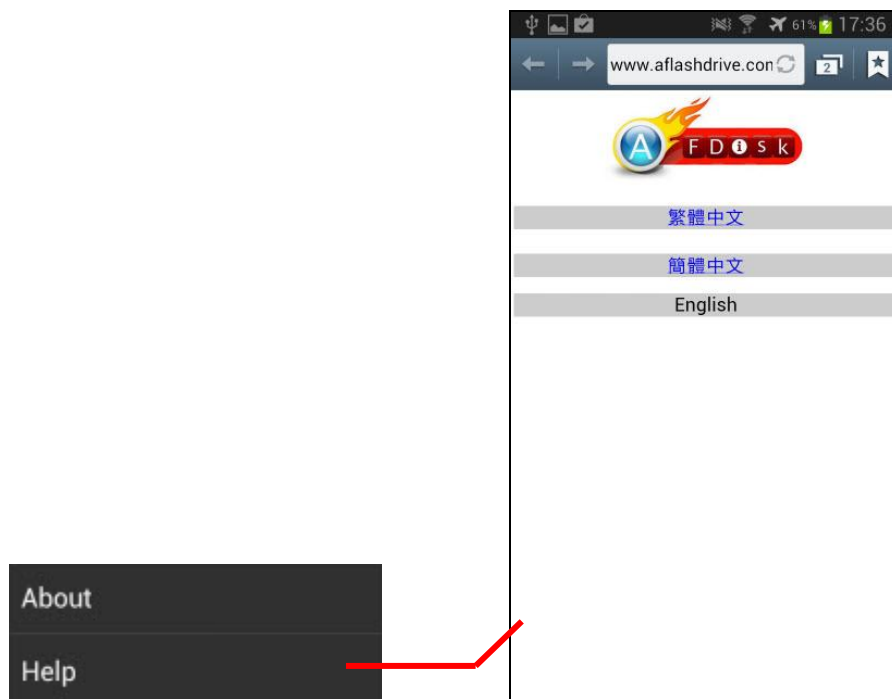Press your phone's function key to display the "About and Help" menu.

About: APP Version、Android OS Version、Phone Model and Firmware Version
   displays.

Help: Visit our online service website for operation instructions, FAQs and a list of
   compatible mobile phones.

Note: Please ensure that your mobile phone is connected to a WiFi hot point or 3G
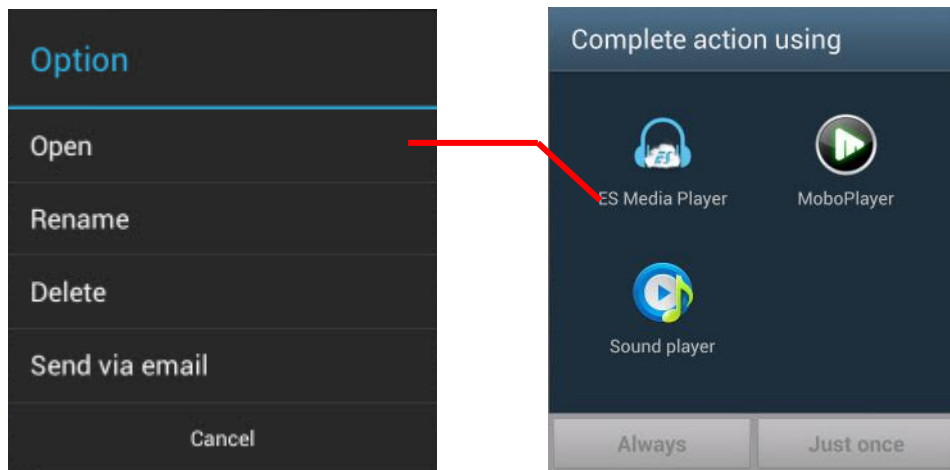   network.

File Management

Single File Operation

The list of files in the storage is displayed once you enter the Local Storage/External Storage menu. Tap on and hold each file to open the function menu for 「Open」, 「Rename」, 「Delete」, and 「Send via mail」 or tap on 「Cancel」 to exit to the file list screen.
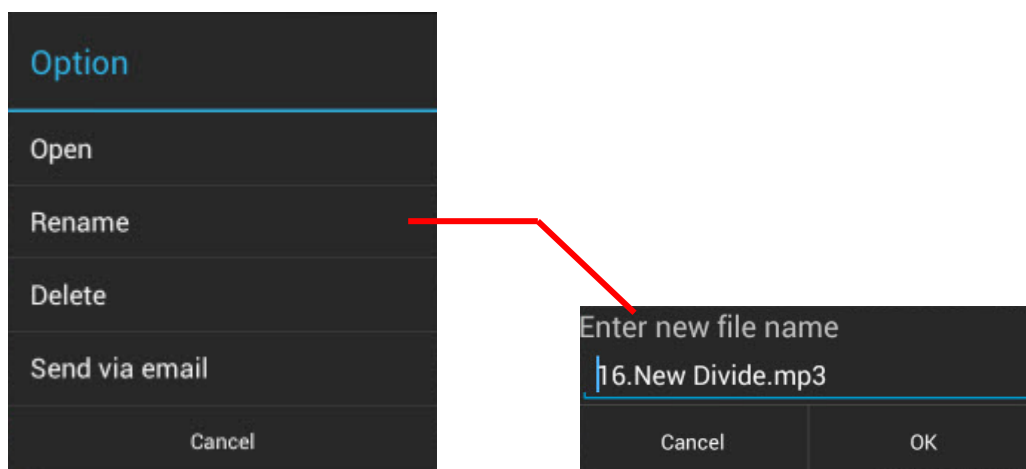
Open

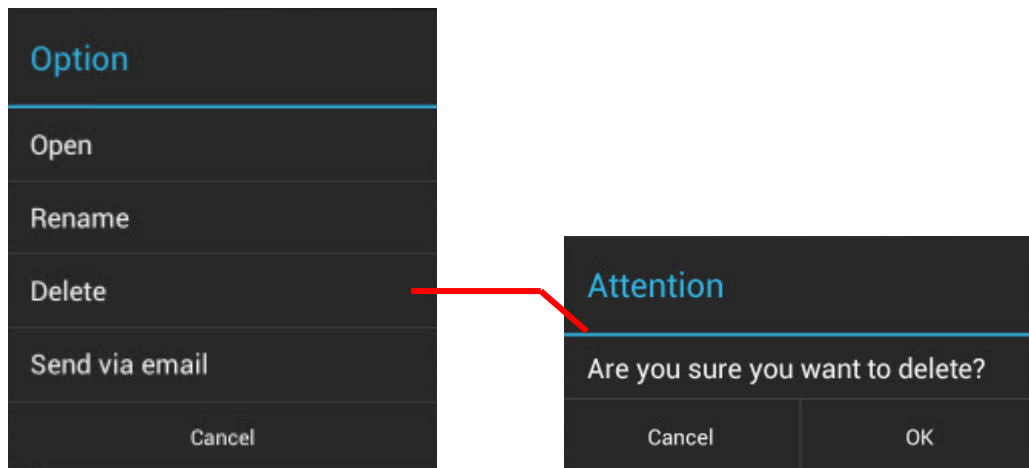Tap on 「Open」 to start the APP of the file.

Rename

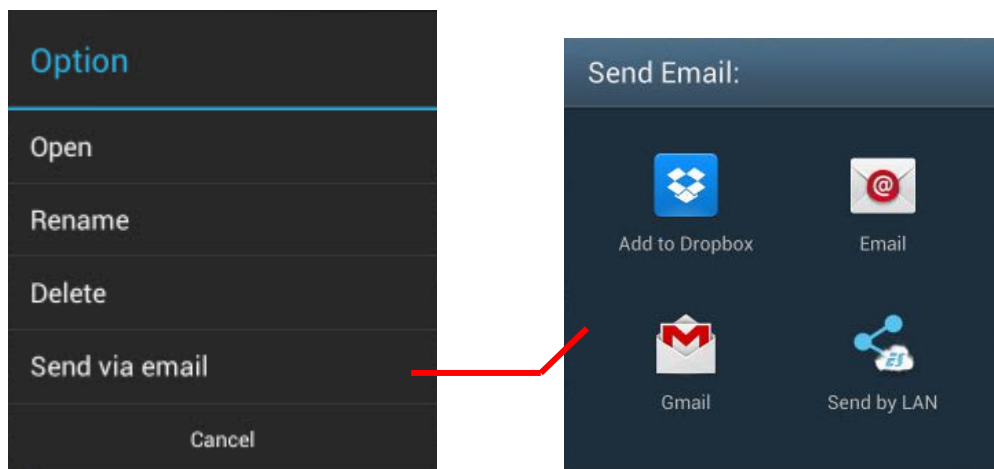Tap on 「Rename」 to change file name.

Delete

Tap on「Delete」to remove selected file after taping on 「OK」.

Send via mail

Tap on「Send via mail」, then select the desired email app and send the file with the email.

Multiple File Operation (Local Storage)

The list of files in the internal storage is displayed once you enter the Local Storage menu while the 「Return to root」,「Return on top」,「Create new directory」, and 「Select all」 function icons are displayed in tool bar.
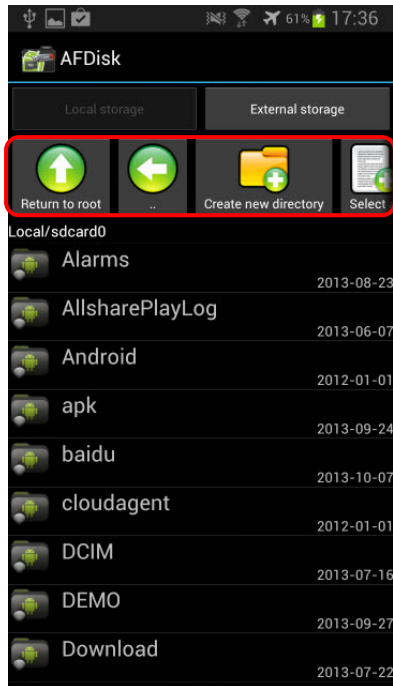
Return to root

Tap on [icon: Return to root] to return to the default directory (APP main screen) of your "Local Storage".

Return on top

Tap on [icon] to return to the last directory.

Create new directory

Tap on [icon: Create new directory] to create a new folder in the current directory.
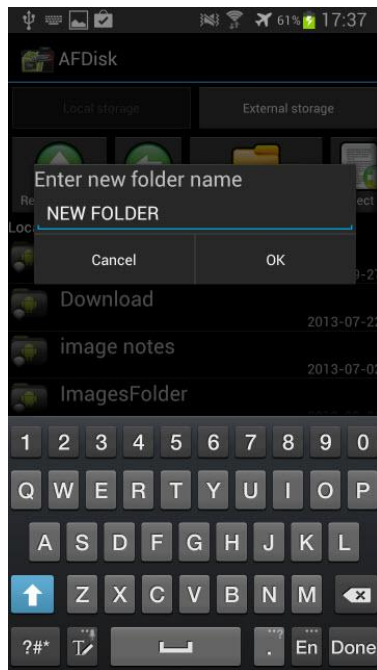
Select all

Tap on to select all files and folders in the current directory.

Tap on the file/folder icon to select the desired option (Figure 1). The circle of the file/folder is then checked (Figure 2) and the 「Remove all」, 「Cut」, 「Copy」, 「Delete」 and 「Send via email」 function icons display in the tool bar (Figure 3).
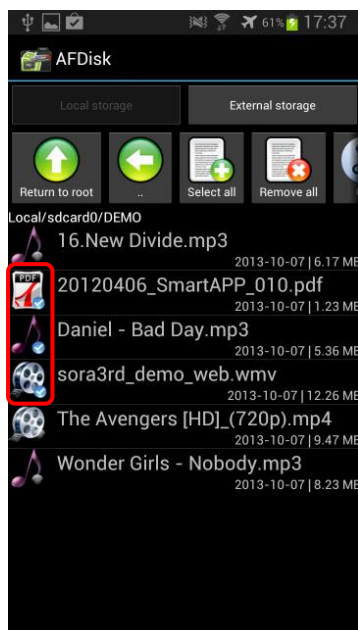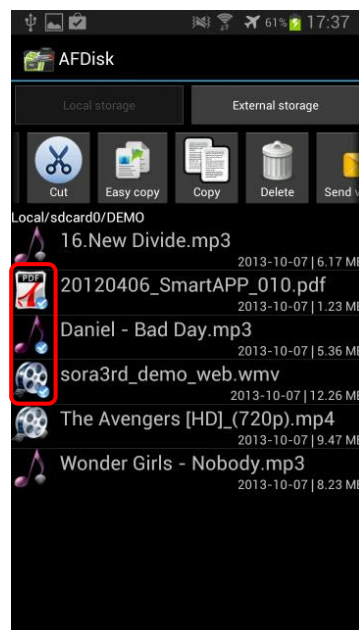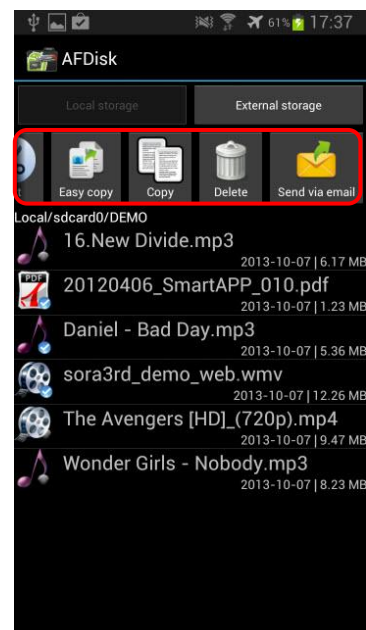

Figure 1   Figure 2   Figure 3

Remove all

Tap on to deselect the files and folders that have been selected.

Cut

Tap on to move the selected file/folder to another directory (Figure 1). The directory position and grid lines turn yellow for the selected files (Figure 2) and you can move them to the desired destination. You may choose to move files to any destination in the Local Storage or External Storage or any newly created folder. Tap on and the selected files start moving.
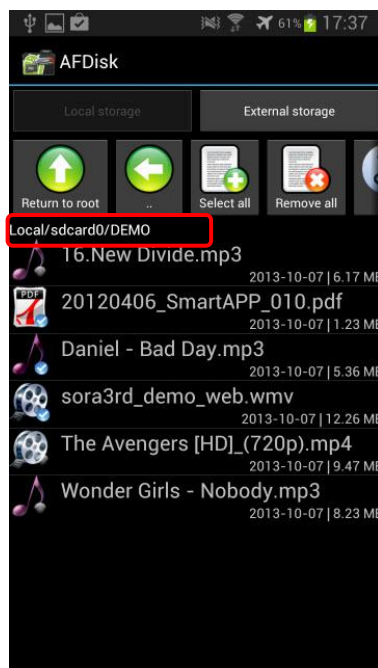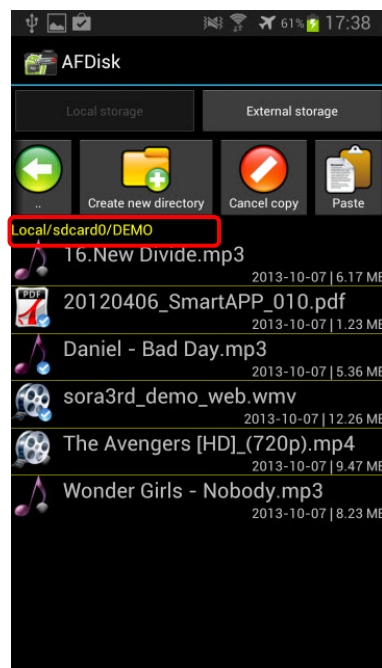


Figure 1   Figure 2

Easy Copy

Tap on to copy selected files/folders to "AFDisk" folders auto created in the "External Storage (Smart Power Drive device)".

Copy

Tap on to copy the selected file/folder to another directory. The directory position and grid lines turn yellow for the selected files and you can move them to the desired destination. You may choose to move files to any destination in the Local Storage or External Storage or any newly created folder. Tap on and the selected files start copying.

Delete

Tap on to remove selected file after taping on 「OK」.

Send via mail

Tap on , then select the desired email app and send the file with the email.

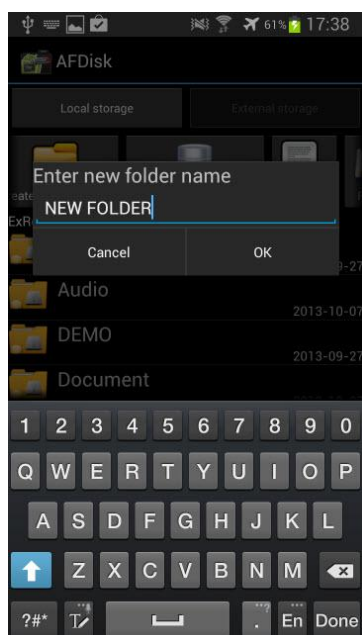## Multiple File Operation (External Storage)

The list of files in the internal storage is displayed once you enter the External Storage (Smart Power Drive) menu while the 「Create new directory」,「Auto create directories」,「Select all」, and 「Format」 function icons are displayed in tool bar.
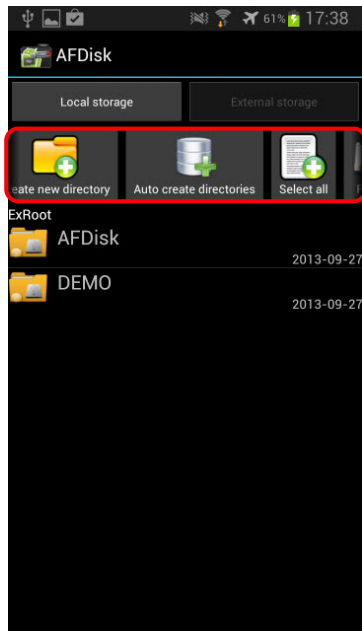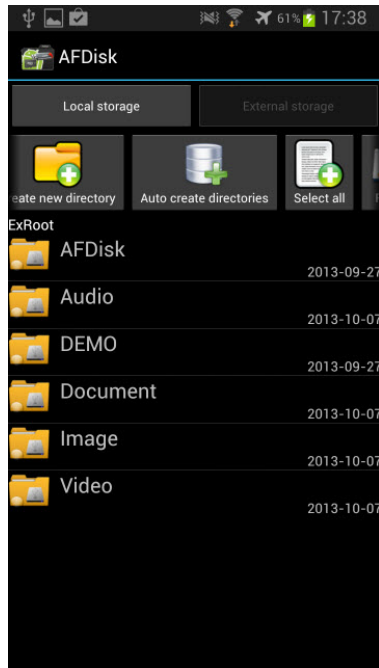

Create new directory

Tap on to create a new folder in the current directory.

Auto create directories

To manage files, tap on to create the 「Audio」,「Document」,「Image」 and「Video」folders automatically.

## Select all

Tap on , and select all files and folders of the directory.

Format

Tap on to format the External Storage (Smart Power Drive) and remove any files/folders contained in it.

Icons of advanced functions displayed in the tool bar after selecting any file/folder, including 「Remove all」,「Cut」,「Copy」,「Delete」, and 「Send via Mail」 can be used the same was as those found in the Local Storage menu.

Limit on its uses

Limits on Smart Power Drive device

Please insert the micro SD card into your Smart Power Drive before using it.

Limits on External Storage

Do not remove the Smart Power Drive device when a mobile phone is connecting Smart Power Drive to run the Open, Copy, Cut, Delete, Send via mail functions in the External storage as this may cause damage or loss of files!

Limits on Remove Smart Power Drive Safely

To remove your Smart Power Drive from a mobile phone safely, tap the Return key in the Local Storage main screen (Figure 1) or the External Storage main screen (Figure 2) to confirm ejecting the device before removing your Smart Power Drive.
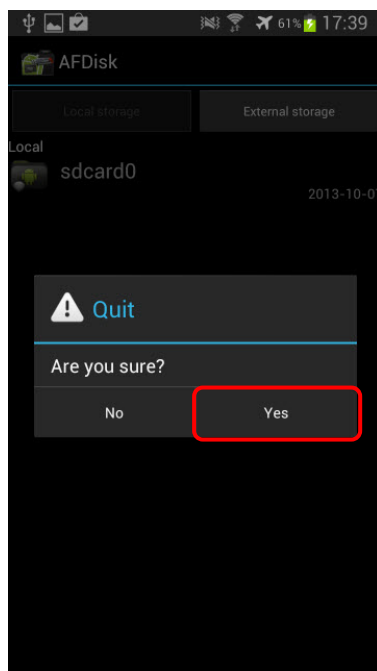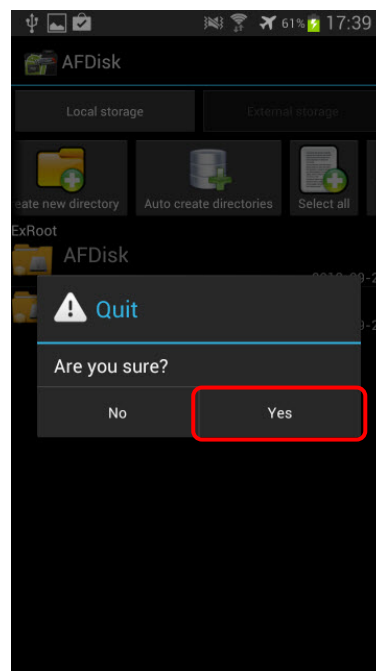
Figure 1   Figure 2

Troubleshooting

Do self checks as below in case of Smart Power Drive operation failure:

1. Is the micro SD / micro SDHC card inserted correctly?
2. In case you cannot connect to a mobile phone or play a video or file, please remove your Smart Power Drive and plug in again for smooth operation.